



Energy saving

Save money on cooling bills



Heat protection

Rejects radiant heat



Light protection

Glare is reduced



Privacy protection

Gives daytime privacy



Uniform temperature

Hot and cool spots are levelled off



Dual reflective

Neutral towards the inside, reflective towards the outside



35 years of experience

One of the longest-operating distributors in the industry



Modern appearance


The building gets more beautiful



UV protection

Protects your health and your valuables

Energy saving on various window systems

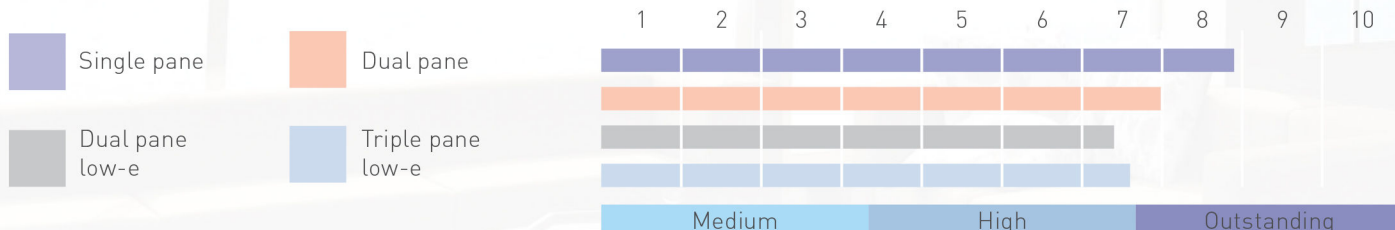

Save energy with window films!

	Single Pane	Dual Pane	Dual Pane Low-e	Triple Pane Low-e
Total Solar Energy Rejected	79%	70%	64%	66%
Visible Light Transmitted	11%	10%	10%	9%
Visible Light Reflected Exterior	54%	59%	59%	58%
Visible Light Reflected Interior	24%	27%	27%	27%
Total Solar Energy Reflected	50%	52%	52%	46%
Total Solar Energy Absorbed	40%	41%	41%	47%
Total Solar Energy Transmitted	10%	7%	7%	6%
SHGC	0,21	0,3	0,36	0,34
UV Rejection	99%	99%	99%	99%
U-Value	5,224	2,749	1,481	1,183
Emissivity	0,84	0,84	0,84	0,84
Compatibility	Compatible	Compatible	Conditionally compatible	Not compatible



Interior/exterior

Interior



Thickness

38 microns



Adhesive

Dry adhesive



Scratch Resistant Coating

2nd generation



Sizes available

1.52x30 m



Warranty

10 years