



Heat protection

Reduces radiant heat



UV protection

Protects your health and your valuables



Light protection

Glare is reduced



35 years of experience

One of the longest-operating distributors in the industry



Neutral appearance

Practically unnoticeable



Manufacturer

Commonwealth Laminating&Coating, USA


Energy saving on various window systems



Single Pane



Dual pane

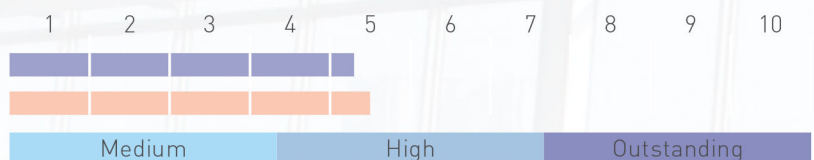

Save energy with window films!

	Single Pane	Dual pane
Total Solar Energy Rejected	43%	45%
Visible Light Transmitted	58%	46%
Visible Light Reflected Exterior	14%	29%
Visible Light Reflected Interior	12%	25%
Total Solar Energy Reflected	12%	25%
Total Solar Energy Absorbed	43%	41%
Total Solar Energy Transmitted	45%	34%
SHGC	0,66	0,55
UV Rejection	99%	99%
U-Value	5,41	2,70
Emissivity	0,84	0,81
Compatibility	Compatible	Compatible



Interior/exterior

Interior



Adhesive

Pressure sensitive



Sizes available

1.52x30 m (60"x100')



Thickness

38 microns (1.5 mil)



Scratch Resistant Coating

2nd generation



Warranty

10 years