



Energy saving

Save money on cooling bills



Heat protection

Rejects radiant heat



Light protection

Glare is reduced



Privacy protection

Gives daytime privacy



Uniform temperature

Hot and cool spots are levelled off



Dual reflective

Neutral towards the inside, reflective towards the outside



35 years of experience

One of the longest-operating distributors in the industry



Modern appearance

The building gets more beautiful



UV protection

Protects your health and your valuables

Energy saving on various window systems



Single pane




Dual pane



Dual pane low-e



Triple pane low-e

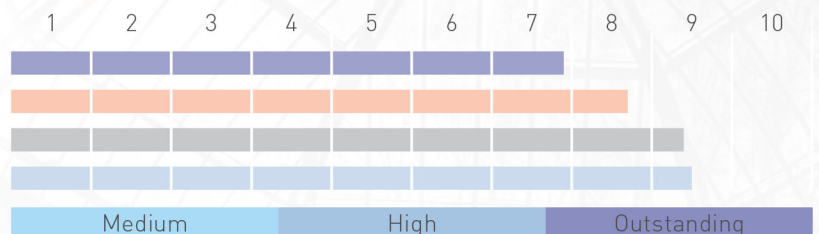

Save energy with window films!

	Single pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	69%	77%	84%	85%
Visible Light Transmitted	19%	18%	17%	15%
Visible Light Reflected Exterior	34%	35%	34%	35%
Visible Light Reflected Interior	14%	21%	17%	22%
Total Solar Energy Reflected	38%	38%	39%	39%
Total Solar Energy Absorbed	45%	46%	50%	51%
Total Solar Energy Transmitted	18%	15%	11%	10%
SHGC	0,31	0,24	0,16	0,15
UV Rejection	99%	99%	99%	99%
U-Value	5,91	2,72	1,42	1,20
Emissivity	0,84	0,84	0,84	0,84
Compatibility	Compatible	Compatible	Conditionally Compatible	Conditionally Compatible



Interior/exterior

Exterior



Thickness

50 microns



Adhesive

Pressure sensitive



Scratch Resistant Coating

2nd generation



Sizes available

1,52x30 m



Warranty

5 years on vertical windows
2.5 years on sloped windows