

Skyfol XT16SPC

Window film



Energy saving

Dramatic savings on cooling bills



Extreme heat protection

No sensation of heat behind the glass



Light protection

Glare is reduced



Privacy protection

Gives daytime privacy



Uniform temperature

Hot and cool spots are levelled off



For polycarbonate

Air permeable and removable



35 years of experience

One of the longest-operating distributors in the industry



Modern appearance

The building gets more beautiful



UV protection

Protects your health and your valuables


Energy saving on various window systems



Single pane



Dual pane

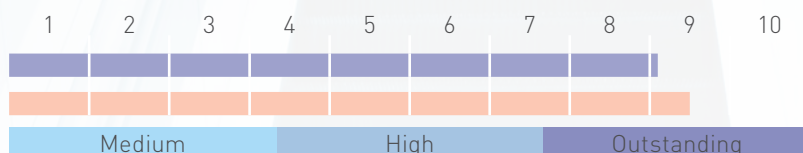

Save energy with window films!

	Single PC	Dual PC
Total Solar Energy Rejected	81%	85%
Visible Light Transmitted	16%	15%
Visible Light Reflected Exterior	65%	65%
Visible Light Reflected Interior	64%	64%
Total Solar Energy Reflected	63%	64%
Total Solar Energy Absorbed	23%	23%
Total Solar Energy Transmitted	12%	11%
SHGC	0,19	0,15
UV Rejection	99%	99%
U-Value	5,9	2,73
Emissivity	0,84	0,84
Compatibility	Compatible	Compatible



Interior/exterior

Exterior



Thickness

50 microns



Adhesive

Pressure sensitive



Scratch Resistant Coating

2nd generation



Sizes available

1,52x30 m



Warranty

4 years on vertical windows
3 years on sloped windows